

Load Sensing is a hydraulic circuit configuration which allows the load, as sensed at the control valve, to modulate pump output in relation to system demand. Controlling both flow and pressure at the pump allows for a significant reduction in valving losses and circuit inefficiencies. The machine is therefore more efficient in terms of power distribution and life is enhanced due to superior load control.

- * Improved Hydraulic System Efficiency
- * Improved Vehicle Life
- * Efficiently Sized Componentry

Benefits of Load Sensing Systems

Load Sensing Systems have been applied to hydraulic applications, in several configurations, to provide efficiency and performance advantages over standard circuit designs. Load sensing piston pumps or load sensing unloading valves have typically been used in these applications. Haldex has developed a load sensing gear pump to combine the advantages of these two technologies. The F20LS (1.41 - 5.30 in.³) and the F30LS (3.54 - 9.82 in.³) provide the following advantages to your machine:

- * Lower Fuel and Input Power Consumption
- * Cooler Hydraulic System Operation
- * Longer Component Life and Reliability
- * Improved Vehicle Power Distribution
- * Better Load Control

Design Advantages of F20LS and F30LS Pumps

The simplicity and inherent advantages of the gear pump design are realized with the F20LS and F30LS. The F20LS and F30LS feature the operational benefits of a piston pump with the performance, reliability, and cost advantages of a gear pump.

- * Lower Pump Cost
- * 4000 PSI Continuous Pressure Rating
- * High Speed Capability
 - Up to 4000 RPM
- * Displacement Flexibility
 - 1.41 to 9.82 in.³/rev.
- * Gear Pump Serviceability
- * Added Tolerance Under Extreme Operating Conditions
 - Contaminated Environments
 - High Temperatures
 - Cold Start-Ups
 - Poor Inlet Circumstances
- * Ultra Quick Response Time to Load Sense Signal
 - 100 milliseconds or Less

How the F20LS and F30LS Pumps Operate

Every hydraulic application has two known operating conditions - **running** (when hydraulic flow is required) and **standby** (when no hydraulic flow is required).


Running Condition:

In the running condition, the F20LS/F30LS load sensing element continuously monitors the output flow required for the system load demand. The pump alters its flow at the pump and matches the system load demand and delivers the exact flow required. Flow regulation at the pump eliminates efficiency losses associated with alternative systems which alter flow at the directional valve and regulate system pressure with a system relief valve.

Standby Condition:

In the standby condition, the load sensing element senses a zero demand condition and unloads all flow directly to the system's reservoir. In the standby condition, flow is unloaded at approximately 20 PSI, hence, greatly reducing horsepower consumption and system heat.

The chart below illustrates the horsepower conservation advantages of the F20LS/F30LS pump when compared to the common alternative system designs of a piston pump and a standard open center valve/gear pump combination.

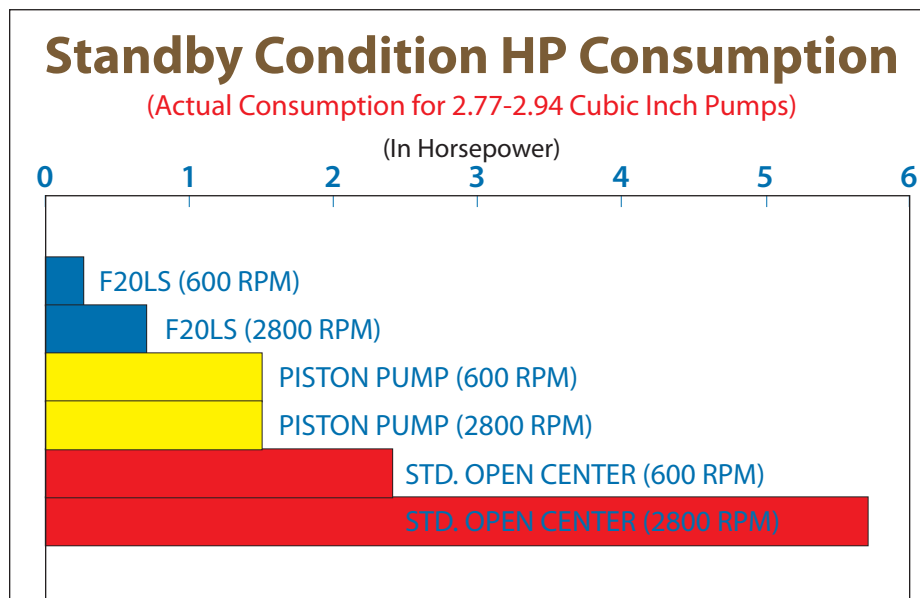

NOTE: In the standby condition, piston pumps operate at 200-500 PSI and produce 1-2 GPM for internal lubrication purposes. This condition results in higher horsepower consumption than the F20LS / F30LS at standby.

Where to Apply the F20LS and F30LS Pumps

Mobile Applications

The F20LS and F30LS are best applied in mobile applications where the vehicle duty cycle is concentrated in either the full speed or the standby condition. The F20LS and F30LS are ideal choices for vehicles which have extended transport or "roading" modes. Examples of these types of vehicles would include tractors, wheel loaders, snow and ice removal trucks and many others. Significant horsepower savings as described above is achieved during the standby mode. The F20LS / F30LS may not have advantages over the piston pump in applications where flow must be continuously "metered", consequently the selection of these pumps is dependent upon the application.

Industrial Applications

The F20LS and F30LS can also be used in many industrial type hydraulic applications to simplify and cost reduce traditional circuits. General load sensing, accumulator unload, vented relief valve, multiple relief valve and other types of circuits can all be simplified and cost reduced by using the F20LS and F30LS pumps. These circuits typically use expensive unloader or vented relief valves and the F20LS and F30LS can reduce system costs by 50% or more by incorporating the load sensing feature in the pump and using significantly less expensive standard directional control valves. (Associated installation costs are also reduced because of the circuit simplification achieved by using the F20LS and F30LS along with standard directional control valving.)

F20LS Specifications and Application Data


Single Model Series	Gear Code	Flow @ 1800 RPM		Theoretical displacement per revolution		Continuous Rated pressure		Rated speed @ rated pressure & .17 bar (6" Hg) vacuum inlet rpm	Unloaded max. speed rpm	Min. speed @ rated pressure rpm*	Typical delivery @ rated speed & pressure	
		l/min	gpm	cm ³	in ³	bar	psi				l/min	gpm
F20LS	23	41.6	11	23	1.41	276	4000	3600	4000	1000	75.7	20
	29	53.0	14	29	1.79	276	4000	3400	4000	800	90.8	24
	36	64.3	17	36	2.18	276	4000	3200	4000	600	105.9	28
	43	75.7	20	43	2.60	276	4000	3000	4000	600	117.3	31
	48	87.0	23	48	2.94	276	4000	2800	4000	600	124.9	33
	55	98.4	26	55	3.33	250	3625	2500	4000	600	128.7	34
	62	109.8	29	62	3.77	228	3300	2500	4000	600	147.6	39
	68	121.1	32	68	4.13	228	3000	2500	4000	600	162.7	43
	77	140.0	37	77	4.71	190	2700	2500	4000	600	185.4	49
	87	155.2	41	87	5.30	170	2375	2300	4000	600	193.0	51

Design flow control should be based on ΔP of 200 PSI across the control orifice. **Adjustable Bias Factory Set at 200 PSI (14 BAR).** **Adjustable System Relief Valve from 1000 - 3000 PSI (69 - 207 BAR) in 250 PSI (15 BAR) increments and from 3000 - 4000 PSI (69 - 276 BAR) in 500 PSI (35 BAR) increments.**

* Lower speeds are permissible when operating below rated pressure.

F20LS Drive Shafts

SAE "B" SPLINE

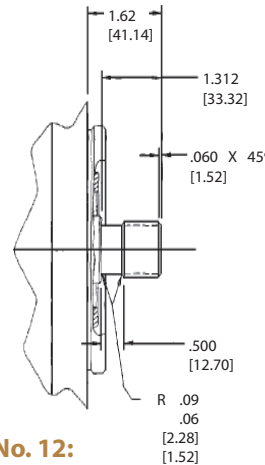


External Involute Spline
Flat Root-Side Fit
No. of Teeth - 13
Dia. Pitch - 16/32
Pressure Angle 30°

Shaft No. 12:

279.6 Nm (2475 in.lb.) torsional capacity.*


SAE "BB" STRAIGHT KEY

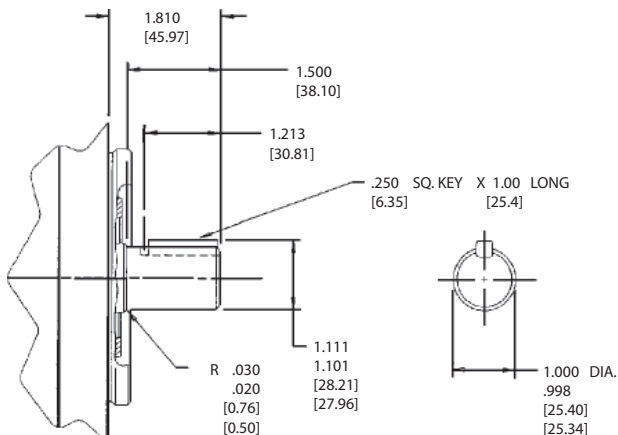

Shaft No. 21:

395.7 Nm (3500 in.lb.) torsional capacity.*

SAE "BB" SPLINE

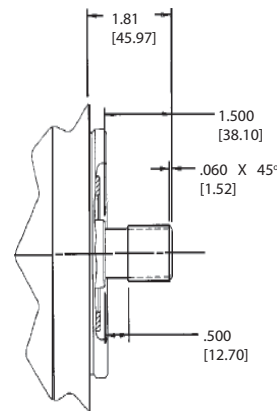

External Involute Spline
Flat Root-Side Fit
No. of Teeth - 15
Dia. Pitch - 16/32
Pressure Angle 30°

Shaft No. 99:

451.9 Nm (4000 in.lb.) torsional capacity.*


* Consult representative if application requires greater capacity or has side loads.

F20LS Installation Dimensions

Inches (mm)

Mounting flange dimensions shown are for SAE "B" 2-Bolt.

SAE "A" flange is also available.

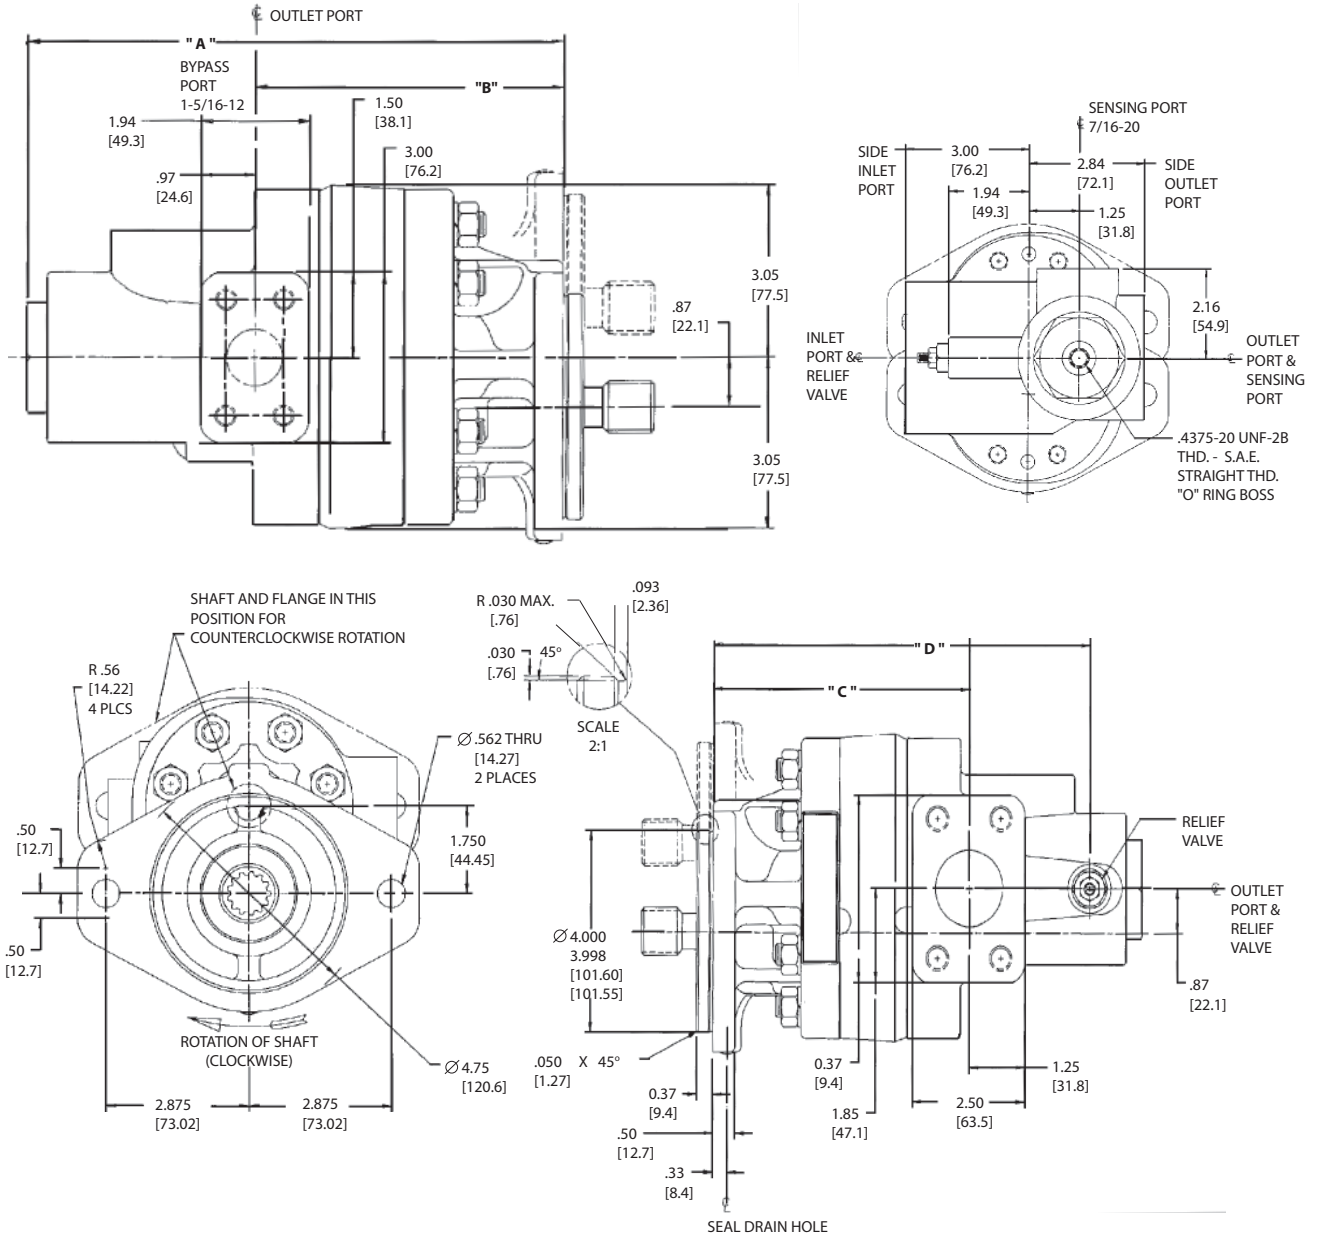

Model	"A" Inch (mm)	"B" Inch (mm)	"C" Inch (mm)	"D" Inch (mm)	App. Wt. Lbs. (kg)
F20LS-2*23*.*.*.*.*	9.03 (229.4)	4.63 (117.6)	4.85 (123.2)	7.67 (194.9)	35.4 (15.65)
F20LS-2*29*.*.*.*.*	9.21 (233.9)	4.81 (122.2)	5.03 (127.8)	7.85 (199.4)	35.0 (15.88)
F20LS-2*36*.*.*.*.*	9.39 (238.5)	4.99 (126.8)	5.21 (132.3)	8.03 (204.0)	35.1 (15.92)
F20LS-2*43*.*.*.*.*	9.58 (243.3)	5.18 (131.6)	5.40 (137.2)	8.22 (208.8)	36.5 (16.56)
F20LS-2*48*.*.*.*.*	9.74 (247.4)	5.34 (135.6)	5.56 (141.2)	8.38 (212.9)	37.0 (16.78)
F20LS-2*55*.*.*.*.*	9.91 (251.7)	5.51 (140.0)	5.73 (145.5)	8.55 (217.2)	37.6 (17.06)
F20LS-2*62*.*.*.*.*	10.11 (256.8)	5.71 (145.0)	5.93 (150.6)	8.75 (222.3)	38.0 (17.24)
F20LS-2*68*.*.*.*.*	10.28 (261.1)	5.88 (149.4)	6.10 (154.9)	8.92 (226.6)	39.0 (17.69)
F20LS-2*77*.*.*.*.*	10.55 (268.0)	6.15 (156.2)	6.37 (161.8)	9.19 (233.5)	40.0 (18.14)
F20LS-2*87*.*.*.*.*	10.82 (274.8)	6.42 (163.1)	6.64 (168.7)	9.46 (240.3)	41.8 (18.96)

F30LS Specifications and Application Data


Single Model Series	Gear Code	Flow @ 1800 RPM		Theoretical displacement per revolution		Continuous Rated pressure		Rated speed @ rated pressure & .17 bar (6" Hg) vacuum inlet rpm	Unloaded max. speed rpm	Min. speed @ rated pressure rpm*	Typical delivery @ rated speed & pressure	
		l/min	gpm	cm ³	in ³	bar	psi				l/min	gpm
F30LS	58	94.0	24.8	58	3.54	276	4000	3000	4000	600	156.9	41.4
	68	109.9	29.0	68	4.13	276	4000	3000	4000	600	183.1	48.3
	80	130.4	34.4	80	4.91	276	4000	3000	4000	600	217.6	57.4
	91	146.7	38.7	91	5.51	276	4000	2750	4000	600	223.6	59.0
	97	156.9	41.4	97	5.89	276	4000	2500	4000	600	217.6	57.4
	104	167.5	44.2	104	6.30	250	3625	2500	4000	600	232.7	61.4
	113	183.4	48.3	113	6.88	250	3400	2500	3700	600	233.9	67.0
	129	208.8	55.1	129	7.86	228	2900	2400	3300	600	278.6	73.5
	145	239.0	62.0	145	8.84	190	2550	2300	2900	600	300.2	79.2
	161	261.1	68.9	161	9.82	170	2300	2200	2500	600	319.1	84.2

Design flow control should be based on ΔP of 200 PSI across the control orifice. **Adjustable Bias Factory Set at 200 PSI (14 BAR). Adjustable System Relief Valve from 1000 - 3000 PSI (69 - 207 BAR) in 250 PSI (15 BAR) increments and from 3000 - 4000 PSI (69 - 276 BAR) in 500 PSI (35 BAR) increments.**

* Lower speeds are permissible when operating below rated pressure.


F30LS Drive Shafts

SAE "C" STRAIGHT KEY

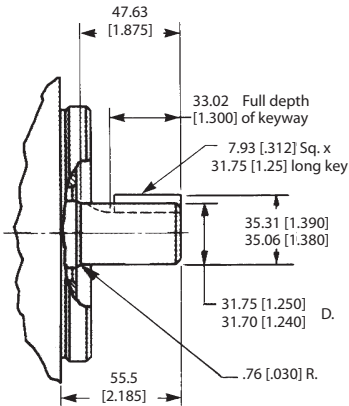

Shaft No. 1:
720.8 Nm (6380 in. lb.) torsional capacity.*


SAE "C" SPLINE

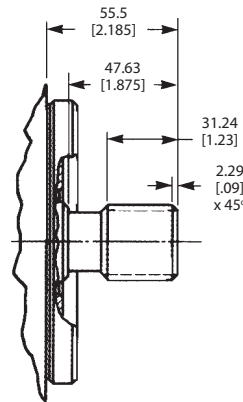

External Involute Spline
Flat Root - Side Fit
No. of Teeth - 14
Diametral Pitch - 12/24
Pressure Angle - 30°

Shaft No. 12:
819.1 Nm (7250 in. lb.) torsional capacity.*

SAE "B" SPLINE

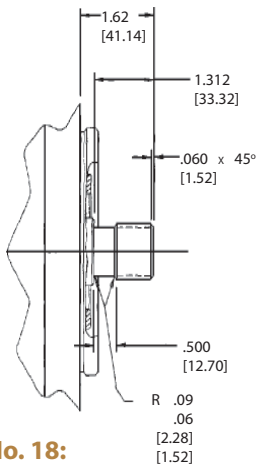

External Involute Spline
Flat Root - Side Fit
No. of Teeth - 13
Diametral Pitch - 16/32
Pressure Angle - 30°

Shaft No. 18:
279.6 Nm (2475 in. lb.) torsional capacity.*

NOTES:

Shaft #18 only available with displacements 58 and 68.

Contact factory for other shaft requirements not listed.


* Consult representative if application requires greater torsional capacity or has side loads.

F30LS Installation Dimensions

Inches (mm)

Mounting flange dimensions shown are for SAE "C" 4-Bolt.

Other SAE "B" and SAE "C" flanges are also available.

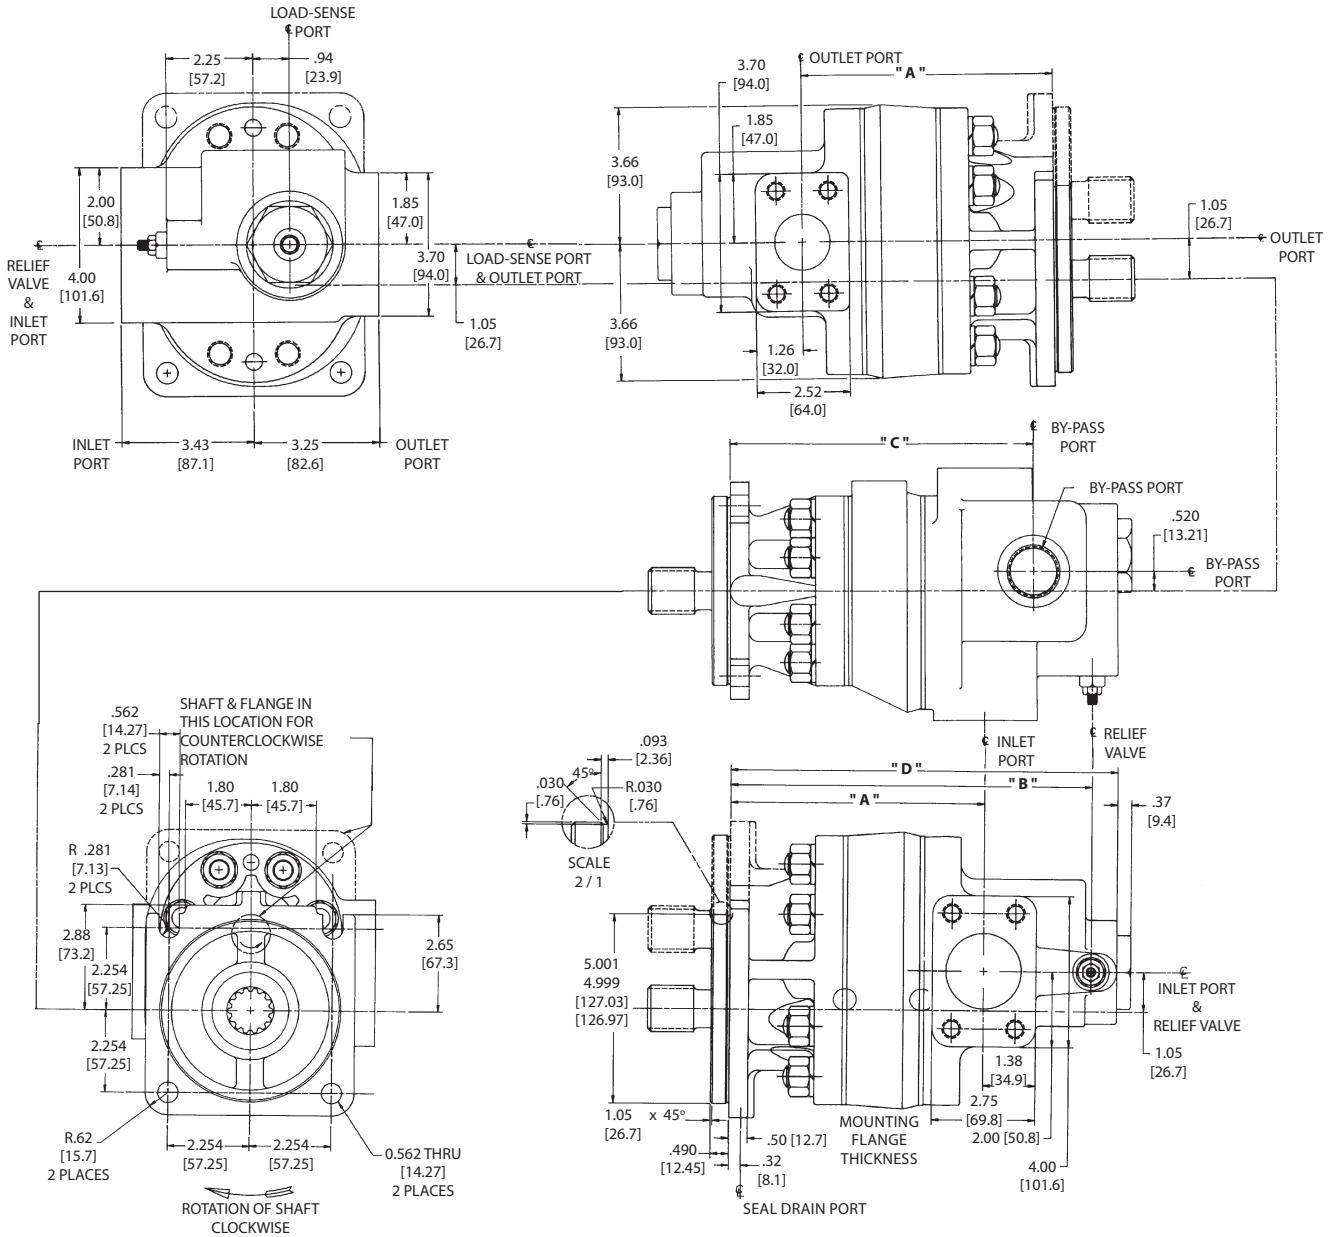

Model	"A" Inch (mm)	"B" Inch (mm)	"C" Inch (mm)	"D" Inch (mm)	App. Wt. Lbs. (kg)
F30LS-4E58**_**_**_**_**	5.96 (151.4)	8.81 (223.8)	7.26 (184.4)	9.49 (241.0)	52.3 (23.7)
F30LS-4E68**_**_**_**_**	6.15 (156.2)	9.00 (228.6)	7.45 (189.2)	9.68 (245.9)	53.1 (24.1)
F30LS-4E80**_**_**_**_**	6.39 (162.3)	9.24 (234.7)	7.69 (195.3)	9.92 (151.0)	55.1 (25.0)
F30LS-4E91**_**_**_**_**	6.55 (166.2)	9.40 (238.8)	7.85 (199.4)	10.08 (256.0)	56.3 (25.5)
F30LS-4E97**_**_**_**_**	6.70 (170.2)	9.55 (242.6)	8.00 (203.4)	10.23 (259.8)	57.5 (26.1)
F30LS-4E104**_**_**_**_**	6.86 (174.1)	9.71 (246.6)	8.16 (207.3)	10.39 (263.9)	58.5 (26.5)
F30LS-4E113**_**_**_**_**	7.01 (178.1)	9.86 (250.4)	8.31 (211.1)	10.54 (267.7)	60.1 (26.6)
F30LS-4E129**_**_**_**_**	7.32 (185.9)	10.17 (258.3)	8.62 (210.9)	10.85 (275.6)	61.7 (28.0)
F30LS-4E145**_**_**_**_**	7.63 (193.8)	10.48 (266.2)	8.93 (226.8)	11.16 (283.5)	64.3 (29.2)
F30LS-4E161**_**_**_**_**	7.94 (201.7)	10.79 (274.1)	9.24 (234.7)	11.47 (291.3)	66.5 (30.2)

How To Order F20LS Series Pumps

ORDERING INFORMATION

Each option has been assigned an order code -- listed in the tables below -- for placement in the sequence shown at right.

1 (Special Seals)

Order Code	Description
F3	Viton Seal
Omit	Standard

2 (Pump type)

Order Code	Description
F	Ferra Series Gear Pump

3 (Series)

Order Code	Description
20LS	F20 Load Sense **

4 (Mounting Flange)

Order Code	Description
1	SAE "A" 2-Bolt Flange
2	SAE "B" 2-Bolt Flange
6	SAE "B" 2 & 4-Bolt Combination Flange

5 (Inlet Port Connections)

Order Code	Description
A	43 cc & Under (2.6 In. ³) displacement - SAE 1.875-12
B	48 cc & Over (2.9 in. ³) displacement - 4-Bolt 1-1/2"

6 (Displacement)

Order Code	Cm ³ /In ³	Order Code	Cm ³ /In ³
23	23/1.41	55	55/3.33
29	29/1.79	62	62/3.77
36	36/2.18	68	68/4.13
43	43/2.60	77	77/4.71
48	48/2.94	87	87/5.30

7 (Outlet Port Connections)

Order Code	Description
A	43 cc & Under (2.6 in. ³) displacement - #16 SAE (1.3125"-12)
B	48 cc & Over (2.9 in. ³) displacement - 1", SAE 4-Bolt

ByPass Port: 1 5/16-12 for all sizes
Load Sense Port: 7/16-20 for all sizes

8 (Shaft Seal)

Order Code	Description
A	Single
B	Double
J	Double, Outer Inverted
X	None

** Multiple pumps available. Contact factory.

EXAMPLE:

(F3)- F- 20LS- 1- A- 23- A- A- 1- A- L- 25

1	2	3	4	5	6	7	8	9	10	11	12
Special Seals	Pump Type	Series	Mounting	Inlet Port	Displacement	Outlet Port	Shaft Seal	Shaft Type	Unload Pressure	Shaft Rotation	R. V. Setting

9 (Shaft Types)

Order Code	Description
1	SAE "B" Straight Keyed, .875" dia., 1.312" ext.
11	SAE "B" 13 Tooth Spline (Major Diameter Fit)
12	SAE "B" 13 Tooth Spline (Flat Root-Side Fit)
21	SAE "BB" Straight Keyed 1" dia., 1.50" ext.
99	SAE "BB" 15 Tooth Spline (Flat Root-Side Fit)

Contact factory for other requirements.

10 (Unload Pressure)

Order Code	Description
A	18 PSI Standard Bypass Spring
B *	45 PSI Bypass Spring

* "B" unload spring option required when system contains a high rate compensator in the directional control valve.

11 (Shaft Rotation)

Order Code	Description
L	Counterclockwise
Omit	Clockwise

12 (Relief Valve Setting)

Order Code	Description
10	1000 PSI (69 BAR)
12	1250 PSI (86 BAR)
15	1500 PSI (103 BAR)
17	1750 PSI (121 BAR)
20	2000 PSI (138 BAR)
22	2250 PSI (155 BAR)
25	2500 PSI (172 BAR)
27	2750 PSI (190 BAR)

13 (Load Sense Options)

Order Code	Description
A	Standard Load Sense
B	12 VDC with Spade Connector
C	24 VDC with Type C Connector
D	120 VAC with Type C Connector
E	240 VAC with Type C Connector

14 (Design Designation)

Order Code	Description
10	Modification Level
	Design Level

Standard factory relief valve setting is 2500 PSI (172 BAR).
 Contact factory for other settings.

Patent #5,244,358
Patent #5,368,061

How To Order F30LS Series Pumps

ORDERING INFORMATION

Each option has been assigned an order code -- listed in the tables below -- for placement in the sequence shown at right.

1 (Special Seals)

Order Code	Description
F3	Viton Seal
Omit	Standard

2 (Pump Type)

Order Code	Description
F	Ferra Series Gear Pump

3 (Series)

Order Code	Description
30LS	F30 Load Sense **

4 (Mounting Flange)

Order Code	Description
4	SAE "C" 4-Bolt Mount
6	SAE "B" 2 & 4-Bolt Combination Mount (consult factory)
7	SAE "C" 2-Bolt Mount
8	SAE "C" 2 & 4-Bolt Combination Mount

5 (Inlet Port Connections)

Order Code	Description
D	1.50", SAE 4-Bolt Split Flange
DM	1.50", 4-Bolt Metric Split Flange (M12 x 1.75" Threads)
E	2.00", SAE 4-Bolt Split Flange
EM	2.00", 4-Bolt Metric Split Flange (M12 x 1.75" Threads)
W	#20 SAE (1 5/8" - 12) Straight Thread
X	#24 SAE (1 7/8" - 12) Straight Thread
Y	#30 SAE (2 1/2" - 12) Straight Thread

6 (Displacement)

Order Code	Cm ³ /In ³	Order Code	Cm ³ /In ³
58	58/3.54	104	104/6.30
68	68/4.13	113	113/6.88
80	80/4.91	129	129/7.86
91	91/5.51	145	145/8.84
97	97/5.89	161	161/9.82

7 (Outlet and Bypass Port Connections)

Order Code	Description
C	1.250", SAE 4-Bolt Split Flange
CM	1.250", 4-Bolt Metric Split Flange (M10 x 1.50" Threads)
D	1.50", SAE 4-Bolt Split Flange
DM	1.50", 4-Bolt Metric Split Flange (M12 x 1.75" Threads)
V	#16 SAE (1.3125" - 12) Straight Thread
W	#20 SAE (1 5/8" - 12) Straight Thread
X	#24 SAE (1 7/8" - 12) Straight Thread

NOTE: The same port size must be selected for both the outlet and bypass ports.

Load Sense Port:	7/16-20 for all sizes
-------------------------	------------------------------

** Multiple pumps available. Contact factory.

EXAMPLE:

(F3)- F- 30LS-4- E- 91-D- A-1-B- L-30

1	2	3	4	5	6	7	8	9	10	11	12
Special Seals	Pump Type	Series	Front Cover	Inlet Port	Displacement	Outlet Bypass Port	Shaft Seal	Shaft Type	Unload Pressure	Shaft Rotation	R. V. Setting

8 (Shaft Seal)

Order Code	Description
A	Single
B	Double
J	Double, Outer Inverted
X	None

9 (Shaft Types)

Order Code	Description
1	SAE "C" Straight Keyed, 1.250" Dia., 1.875" Ext.
12	SAE "C" 14-Tooth Spline (Flat Root-Side Fit)
18 *	SAE "B" 13-Tooth Spline (Flat Root-Side Fit)

* Only available for Displacements 58 & 68.

Contact factory for requirements not listed above.

10 (Unload Pressure)

Order Code	Description
A	30 PSI Standard Bypass Spring
B*	60 PSI Bypass Spring

* "B" unload spring option required when system contains a high rate compensator spring in the directional control valve.

11 (Shaft Rotation)

Order Code	Description
L	Counterclockwise
Omit	Clockwise

12 (Relief Valve Setting)

Order Code	Description
10	1000 PSI (69 BAR)
12	1250 PSI (86 BAR)
15	1500 PSI (103 BAR)
17	1750 PSI (121 BAR)
20	2000 PSI (138 BAR)
22	2250 PSI (155 BAR)
25	2500 PSI (172 BAR)
27	2750 PSI (190 BAR)

13 (Load Sense Options)

Order Code	Description
A	Standard Load Sense
B	12 VDC with Spade Connector

14 (Design Designation)

Order Code	Description
20	
└───┬───	Modification Level
└───┬───	Design Level

Standard factory relief valve setting is 2500 PSI (172 BAR).
Contact factory for other settings.

Patent #5,244,358
Patent #5,368,061

PUMPS & MOTORS

Cast Iron Pumps

Heavy Duty



GC Series Pumps

Displacements

0.065 to 0.711 cu. In. (1.06 to 11.65 cc)

GC Series High/Low Pumps

High Pressure Displacements

0.065 to 0.258 cu. In. (1.06 to 4.22 cc)

Low Pressure Displacements

0.258 to 0.776 cu. In. (4.22 to 12.71 cc)

Maximum Pressure

4,000 psi (276 bar)

Maximum Speed

4,000 rpm



F12 & F15 Ferra Series Pumps

F12 Displacements

0.976 to 2.502 cu. In. (16 – 41 cc)

F15 Displacements

1.159 to 3.051 cu. In. (19 to 50 cc)

Maximum Pressure

4,000 psi (276 bar)

Maximum Speed

3,600 rpm



F20/F30 Pumps & F20-LS/F30-LS Load Sense Ferra Series Pumps

Displacements

1.41 to 9.82 cu. In. (23 to 161 cc)

Maximum Pressure

4,000 psi (276 bar)

Maximum Speed

3,600 rpm



D Series Pumps

Displacements

0.232 to 1.395 cu. In. (3.80 to 22.85 cc)

D Series High/Low Pumps

High Pressure Displacements

0.465 cu. In. (7.62 cc)

Low Pressure Displacements

0.930 to 1.395 cu. In. (15.24 to 22.86 cc)

Maximum Pressure

3,000 – 4,000 psi (207 – 276 bar)

Maximum Speed

3,600 – 4,000 rpm

Aluminum Pumps

Medium/Light Duty



W-Series Pumps

W100 Displacements

0.031 to 0.122 cu. In. (0.50 to 2.00 cc)

W300 Displacements

0.049 to 0.347 cu. In. (0.80 to 5.70 cc)

W600 Displacements

0.244 to 0.732 cu. In. (4 to 12 cc)

W900 Displacements

0.305 to 1.891 cu. In. (5 to 31 cc)

W1200 Displacements

1.526 to 2.014 cu. In. (25 to 33 cc)

W1500 Displacements


1.159 to 3.051 cu. In. (19 to 50 cc)

Maximum Pressure

4,000 psi (276 bar)

Maximum Speed

500 to 4,000 rpm



WQ900 Pumps

Displacements

0.305 to 1.648 cu. In. (5 to 27 cc)

Maximum Pressure

3,336 psi (230 bar)

Maximum Speed

4,000 rpm

Fluid Motors



Cast Iron

Displacements

0.065 to 9.82 cu. In. (1.06 to 161 cc)

Speed

Up to 10,000 rpm

Aluminum

Displacements

0.244 to 3.050 cu. In. (4 to 50 cc)

Speed

Up to 4,000 rpm

Flow Dividers



GC & D Series

GC Displacements

0.097 to 0.517 cu. In. (1.58 to 8.47 cc)

D Displacements

0.232 to 0.813 cu. in. (3.8 to 13.32 cc)

Maximum Pressure

4,500 psi (310 bar)

Maximum Input Flow Per Section

14 gpm (53 lpm)

Call us for more information

For application assistance or detailed literature on any product line, call us toll-free: **1-800-572-7867.**

Visit our web site: <http://www.concentricAB.com>

E-mail us: info.hydraulics.us@concentricAB.com

Only Concentric offers this extensive range of products worldwide.

POWER PACKS



PUMP/MOTORS (DC/AC)

DC Voltage Range

12 to 72 VDC

AC Horsepower Range

1/2 to 3 HP

Pump Displacements

0.04 – 1.71 cu. In. (0.65 to 28 cc)

Maximum Pressure

4,000 psi (276 bar)



HB800 POWER PACKS

Voltage Range

12 to 24 VDC

Pump Displacements

0.037 to 0.092 cu. In. (0.60 to 1.5 cc)

Reservoirs

0.13 to 1 gal. (.5 to 3.8 ltr.) plastic

Maximum Pressure

2,610 psi (180 bar)



HE1000 SERIES POWER PACKS

Voltage Range

12 to 24 VDC

Pump Displacements

0.015 to 0.122 cu. In. (0.24 to 2 cc)

Maximum Pressure

3,336 psi (230 bar)

Reservoirs

0.13 to 1.0 gal. (0.5 to 3.8 ltr.) plastic



HE2000 SERIES POWER PACKS

Voltage Range

12 to 24 VDC, 115 to 230 VAC

Pump Displacements

0.049 to 0.388 cu. In. (0.80 to 6.36 cc)

Maximum Pressure

3,336 psi (230 bar)

Reservoirs

0.95 qt. to 3.96 gal. (0.9 to 15 ltr.) steel,
0.8 to 1.7 qt. (0.76 to 1.6 ltr.) plastic



HE "BOX" POWER PACKS

Voltage Range

12 to 24 VDC

Pump Displacements

0.049 to 0.388 cu. In. (0.80 to 6.36 cc)

Maximum Pressure

3,336 psi (230 bar)

Reservoirs

3 qt. to 5.0 gal. (2.84 to 19 ltr.) steel

HE-Q (QUIET) POWER PACKS

Voltage Range

24 VDC

WQ300 Pump Displacements

0.073 to 0.347 cu. In. (1.2 to 5.7 cc)

Noise

42dB(A)



BIROTATIONAL POWER PACKS

Voltage Range

12 to 24 VDC, 115 to 230 VAC

Pump Displacements

0.049 to 0.129 cu. In. (0.80 to 2.11 cc)

Reservoirs

2 to 2.96 qt. (1.9 to 2.8 ltr.) plastic,
1 to 2 gal. (3.8 to 7.6 ltr.) steel



AC POWER PACKS GC-9500 SERIES

Displacements

0.065 to 1.394 cu. In. (1.06 to 22.85 cc)

Maximum Pressure

3,000 psi (207 bar)

Maximum Speed

3,600 rpm

Reservoirs

5 to 20 gal. (19 to 76 ltr.) steel

PRODUCT RANGE

HE Powerpacks

12/24/48 VDC 0.3 – 4.5 kW and
0.75 – 3 kW AC modular power packs

HE Box Powerpacks

12/24/48 VDC modular powerpacks
in weatherproof boxes

Pressure Switches

5 - 350 bar, connecting/disconnecting

W100 Hydraulic pumps

0,5 - 2,0 cc 227 bar

W300 Hydraulic pumps

0,8 – 5,7 cc 230 bar

W600 Hydraulic pumps / motors

3 – 12 cc 276 bar

W900 Hydraulic pumps / motors

5 – 31 cc/section 276 bar

Calma The new quiet pumps

6,2 - 23,7 cc/section 250 bar

WQ900 The quiet pumps

5 - 23 cc/section 230 bar

WP900X Hydraulic pumps

16 - 31 cc/section 276 bar

W1500 Hydraulic pumps / motors

19 - 50 cc/section 276 bar

F12 FERRA Heavy duty pumps

16 - 41 cc/section 276 bar

F15 FERRA Heavy duty pumps

19 - 50 cc/section 276 bar

F20/F30 (LS) Hydraulic pumps / motors

23 – 161 cc/section 276 bar

GPA Internal Gear pumps

1,7 – 63 cc/section 100 bar

GC Hydraulic pumps / motors

1,06 – 11,65 cc/section 276 bar

D Hydraulic pumps

3,8 – 22,9 cc/section 207 bar

H Hydraulic pumps

9,8 – 39,4 cc/section 207 bar

II-Stage Hydraulic pumps

4,2 – 22,8 cc/section 276 bar

Rotary Flow Dividers

3,8 – 13,3 cc/section 300 bar

Transmission pumps

www.concentricAB.com



Concentric Rockford Corp.

2222 15th Street
ROCKFORD, IL 61104
USA
Tel: +1-815 398 4400
Fax: +1-815 398 5977
E-mail: info.hydraulics.us@concentricAB.com

Concentric Hof GmbH

Postfach 1507
D-95014 HOF
Germany
Tel: +49-9281 895-0
Fax: +49-9281 87133
E-mail: info.hydraulics.eu@concentricAB.com

Concentric Skanes AB

Box 95
SE-280 40 SK. FAGERHULT
Sweden
Tel: +46-433 32400
Fax: +46-433 30546
E-mail: info.hydraulics.eu@concentricAB.com

Concentric Suzhou Co. Ltd.

47 Dongjing Industrial Park
9 Dong Fu Lu
SIP, Suzhou
Jiangsu
China 215123
Tel +86 512 8717 5100
Fax +86 512 8717 5101
info.chsh@concentricAB.com



Concentric is an innovator in flow control and fluid power, supplying proprietary systems and components for trucks, buses and industrial vehicles, worldwide. With 1,156 employees and yearly sales exceeding 1,977 million Swedish Kronor, Concentric AB is listed on the Stockholm Stock Exchange (www.concentricAB.com).

Concentric will not accept responsibility for any catalog errors and reserves the right to modify its products without prior notice. This also applies to products already ordered, provided that such modifications can be made without affecting technical specifications. All trademarks in this material are properties of their respective owners.